



VERTIV™

Liebert®

SPM™ 2.0

20kVA - 200kVA

Next Generation Power Distribution
range for mission critical businesses



WE ARE VERTIV

VERTIV, formerly known as Emerson Network Power, is an industry leader in Offering cutting-edge power, thermal, & infrastructure management solutions, help protect the critical technologies of our customers.




Our highly specialized teams and extensive resources allow us to adapt what's needed, anticipate what's next and continue to find solutions for our customers.

Retaining the same ingrained values of innovation and the customer-centric analogy of Emerson Network Power, We help strengthen the world's most vital applications by bringing together global reach and local knowledge, and our decades-long heritage including brands like ASCO, Chloride, Liebert, NetSure and Trellis.

Vertiv Your Vision, our Passion

With a unique combination of industry expertise, technology, and resources, our mission is to design, build, and service mission-critical technologies that drive possibility and innovation.

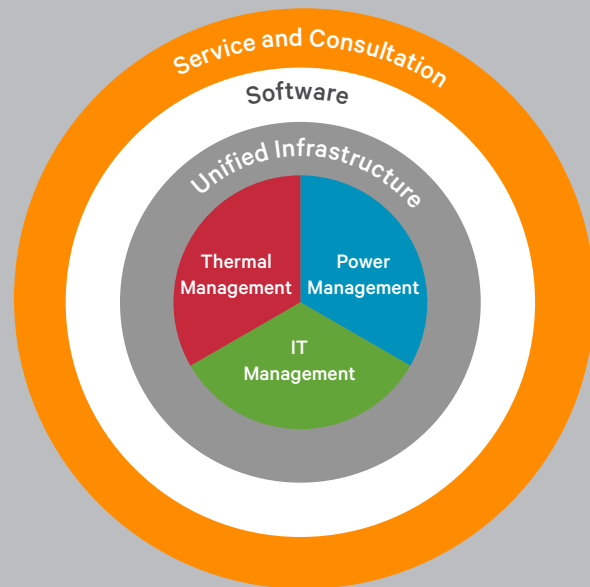

ASCO®

Our global critical power switching, control, and management solutions, engineered to the most demanding specifications, ensures power, reliability, compliance and efficiency

Chloride®

Our global industrial power solutions meet the most demanding technical specifications and provide safe, reliable power- no matter the challenge

NetSure™

Our global intelligently engineered DC power systems deliver high availability, energy efficiency and scalability for converged networks

Liebert®

Our global power and thermal management solutions are some of the world's most efficient and reliable power and cooling technologies

Trellis™

Our industry-leading software gives customers an integrated view of operations across IT and facilities resources, enabling better decisions that save time and money



Business Need

Studies show that 80% of all power-related downtime is caused by disruptions between the UPS and the critical load in data centers. Failures can happen because of human error, equipment failures, load faults, short circuits and any number of peculiar events. Probability says that your equipment will eventually fail, and that human error will happen.

Besides on top of that, Datacenter managers finding it tough to adapt in today's dynamic IT loads demands. Particularly, arranging the downtime of few seconds for power up gradation and maintenance has become much tougher during these days due to supreme dependency and criticality of load. Therefore it become extremely important for power distribution system to live up to the dynamic needs of today's business needs.

The Solution

Liebert SPM2.0 , The Next Generation distribution range

Liebert SPM 2.0 best suits for today's dynamic change in modern IT loads. It's hot swappable distribution modules enable the customer to deploy, upgrade and manage their dynamic IT business requirements in data centre as and when business grow.

It can greatly eliminates the downtime and drastically reduces the deployment time too. Besides, manageability improves the system work efficiency to very high extent and also eliminates likelihood of human errors.

The Next Generation Power Distribution Range For Mission Critical Businesses


1 Intuitive Touch Screen Display:

Display panoramic view of the critical Information more graphically to ease human-machine interaction thus makes maintenance simpler and reduces likelihood of human error.




2 Dual Source

Meeting the requirement of dual source servers while acquiring ZERO footprint requirement. Being placed and shielded separately thus increase the system reliability and shrink the space requirement.




3 Top/ Bottom Cable Entry

Facilitate false flooring and ceiling applications in the datacenter without any additional accessories.




4 Phase Balancing

Thanks to Modular construction, facilitating phase balancing in a trouble free fashion. Outgoing feeder can be moved among phases L1, L2 and L3 to distribute the loads equally .




5 Hotswappable Scrabble Architecture

Enables customer to upgrade and maintain their critical power distribution system safely and easily without power interruption. Scalable from 20 kVA to 200 kVA

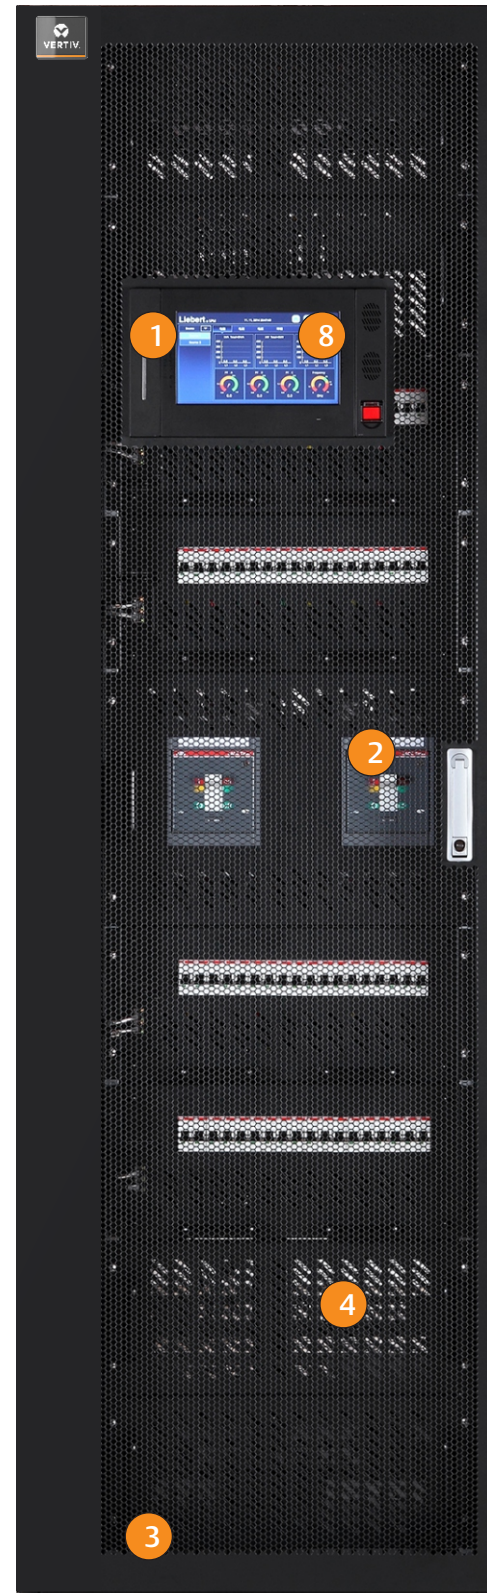



Hot Swappable Outgoing Feeders 6



One module contains 18 sub distribution feeders and each module can house 18 poles. Each modules Support combination of 1/2/3/4 pole MCBs. Such 8 Modules can be placed in single floor mounted rack.

Branch Circuit Monitoring System(BCMS) 7



High accuracy, high speed data acquisition and diagnostic system provide accumulated information, configurable alarms at sub distribution level.

Capacity Management 8



System provides panoramic view of load helps in planning the load management efficiently.

Communication Optional 9



It can be integrated with building management system through MODBUS RTU/ MODBUS TCP or SNMP communication protocol.

Optional Accessories 10



- A host of accessories available with SPM2.0
1. **Built in output Isolation transformer** along with soft-start feature available in k-13, and k-20 variants.
 2. **Transient voltage surge suppression (TVSS)** is available for increased protection from damaging voltage surges.



You Have To Know There Is A Problem Before You Can Correct The Problem

Liebert SPM2.0 features a high resolution and high sensitivity touch screen display designed based on the Cortex A8 processor, allowing for user friendly interaction. Menu-driven LCD allows the user to easily browse the input and output parameters, acquire current status and alarm messages, and perform corresponding parameter settings of the Liebert SPM2.0. It can display the real time Power flow diagram showing the system status and alarm messages. It can store up to 10000 historical events that can be easily retrieved to realize the root cause of faults.

Energy Management from Grid to chip level.

Comprehensive energy management attributes panoramic view of entire power flow from main incomer to individual sub feeders.



Power monitoring of sources:

Power path status via animated single-line mimic display. Shows the current status of main source, source breaker and distribution modules. the individual source Information such as voltage, current, power, energy and harmonics. Gives clear cut picture of power distribution system.

Feeder level Monitoring:

Shows real time feeder information such as Voltage, Current, harmonics and Power Monitoring (kVA, kW, kVAR & PF).



Power Trending :

Displays the historical voltage, current, power, energy consumption and environmental trending of each branch and feeder by a week, Month & Year. Also has the facility can generate report for this.



Exhaustive Event Logger:

It can display the events 10000 events from the source to feeder for configured alarms can prevent the failure of system from overload and environmental conditions

Liebert SPM2.0 Technical Specifications

Capacity(kVA)		20	40	60	80	100	120	160	200	
Main Parameters Capacity										
Input		380V; 50Hz; 3 phase, 5 wires								
Output		Single phase, 3 wires; 3 phase, 5 wires								
Grounding		TN-S								
Power distribution		Flexible configuration of maximum 144 no.								
Breaker Parameters										
Input Breaker		32A	63A	100A	125A	160A	200A	250A	320A	400A
Output Shunt Breaker	Recommended	18 branches, 10A, single phase		72 branches, 16A, single phase		84 branches, 32A, single phase			108 branches, 32A, single phase	
	Maximum	36 branches, customized capacity		90 branches, customized capacity		108 branches, customized capacity		144 branches, customized capacity		
Electrical Parameters										
Rated Insulation Voltage		50Hz/60Hz, 500Vac								
Rated Frequency		50Hz/60Hz								
Operating Voltage		380/400/415Vac								
Protection Level		IP20/IP30								
Environmental Parameters										
Ambient Temperature		-5°C ~ +40°C								
Relative Humidity		Not more than 50%RH at a temperature up to +40°C. Higher RH is allowed at a lower temperature, for example, 90%RH +20°C								
Altitude		≤2000m								
Mechanical Parameters										
Dimensions (W x D x H)(mm)		600 x 1100 x 2000								
Weight		300kg	320kg	380kg	450kg					

*Specifications are subject to change without any prior notification



VertivCo.com | Asia Pacific

© 2017 Vertiv Co. All rights reserved. Vertiv and the Vertiv logo are trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.

AP-UPS-SPM™2.0-V1-1117-EN